


GEOSTAR G7 LQS

GEOSTAR G7 LQS, 230V/2800W, test
channel, copper wedge, EU plug
Article 155.152



Article	155.152	
Voltage	230 V	
Frequency	50/60 Hz	
Power	2800 W	
Temperature	80 – 460 °C	176.0 – 860.0 °F
Speed	0.8 – 12.0 m/min	2.62 – 39.37 ft/min
Welding Technology	Hot wedge	
Hot wedge length	130 mm	5.11 in
Hot wedge width	50 mm	1.96 in
Hot wedge material	Copper	
Max. overlap	150 mm	5.9 in
Max. welding pressure	1500 N	337.21 lbf
Weld seam width	2 x 15 mm / 2 x 0.59 in	
LQS	Yes	
Length	482.0 mm	18.97 in
Width	278.0 mm	10.94 in
Height	269.0 mm	10.59 in
Weight	18.1 kg	39.9 lb
Welding materials	PE	
	HD-PE	
	LD-PE	
	LLD-PE	
	PP	
	TPO	

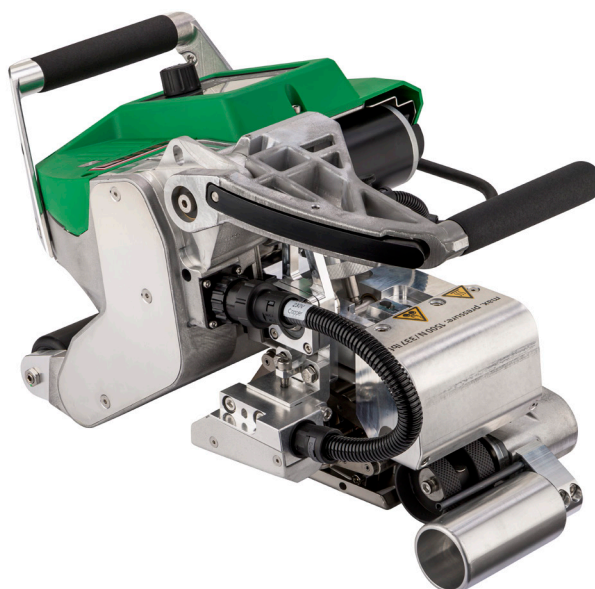

GEOSTAR G7 LQS

GEOSTAR G7 LQS, 230V/2800W, test
channel, copper wedge, EU plug
Article 155.152

	FPO	
Plug	EU, 3 poles, 16A	
Power cable length	3.0 m	9.84 ft
Conformity mark	CE	
Protection class	I	
Country of origin	CH	