


RBR

RBR, 3 x 230/400 V 50 Hz, 3 x 277/480 V 60 Hz
Article 156.049



Article	156.049	
Item name	RBR, 3 x 230/400 V 50 Hz, 3 x 277/480 V 60 Hz	
Blower type	Radial blower	
Phases	3x	
Voltage at 50 Hz	230/400 V	
Voltage at 60 Hz	277/480 V	
Frequency	50/60 Hz	
Blower power at 50 Hz	550 W	
Blower power at 60 Hz	660 W	
Air flow (20 °C) at 50 Hz	16800 l/min	593.28 cfm
Air flow (20 °C) at 60 Hz	20000 l/min	706.28 cfm
Static pressure	2500 Pa	362.58 psi
Max. ambient temperature	60 °C	140 °F
Max. air inlet temperature	350 °C	662 °F
Noise emission level	61 dB (A)	
Air inlet (outer diameter)	90 mm	3.54 in
Air outlet (outer diameter)	90.0 mm	3.54 in
Length	615.0 mm	24.21 in
Width	375.0 mm	14.76 in
Height	613.0 mm	24.13 in
Weight	19.0 kg	41.88 lb

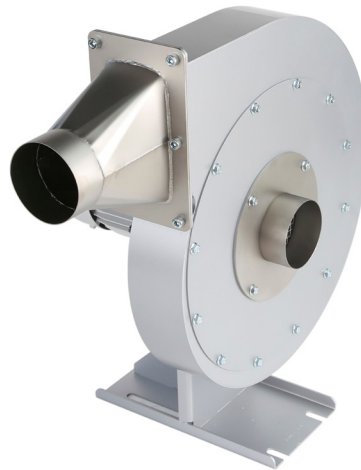

RBR

RBR, 3 x 230/400 V 50 Hz, 3 x 277/480
V 60 Hz
Article 156.049

Conformity mark	CE
Protection class (IEC 60529)	IP54
Protection class	I